

Anboo(Shenzhen) Technology Co., Ltd

# LED Tri-proof Light Spec



## Description

AB9075T Tri-proof Light is resistant to dust, corrosion, and moisture. It's Aluminum body enhances the heat dissipation to encourage longer life span. This luminaire can be widely used in variety of industrial and commercial environment.

## Applications

Factory

Subway

Parking Lot

Warehouse

## Electrical Information

Model No.	AB9075T-0600-20	AB9075T-1200-40	AB9075T-1500-60
Power Consumption	20W	40W	60W
Power Supply	Lifud LED Driver		
Input Voltage	220-240V/120-277V, 50/60 Hz		
Power Factor	0.92		
Efficiency	0.90		
Driver Type	Constant Current (CC)		
Control	0-10V/DALI/Sensor/Zigbee/Bluetooth		

## Optic Information

LED Type	SMD2835
LED Brand	Jufei
Efficacy (4000K Ra80)	120Lm/w 140Lm/w 160Lm/w
Correlated Color Temperature	3000K, 4000K, 5000K, 6000K
Color Rendering Index	Ra80
Beam Angle	120°
UGR level	N/A

## Dimensions and Mount

Product Dimensions	90*75mm
Product Length	600/1200/1500mm or 1800/2400mm
Mounting Option	Suspended, Surface Mounting
Material	Aluminum + Polycarbonate
Finish	Oxidation
Fixture Color	Silver
IK Rating	08
IP Rating	65

## Lifespan and Warranty


Operating Temperature	-20° to 40° C
Warranty	5 Years

## Safety Certifications


CE/RoHs	
---------	--

# Installation


## Ceiling Mounting

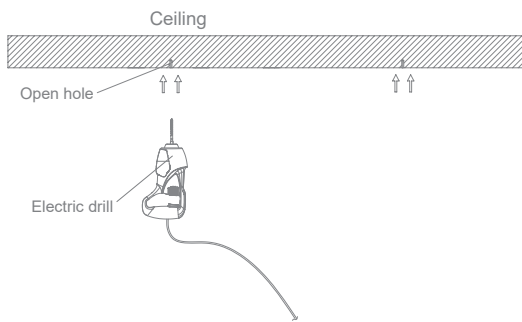


A: Find a right place and drill a hole

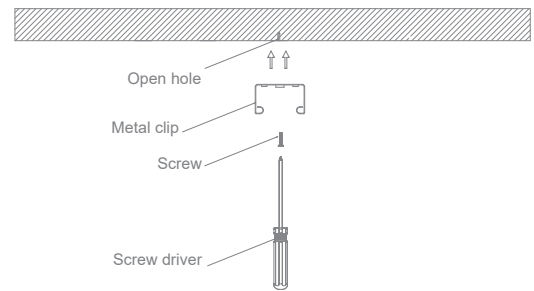

B: Install the clipsto the ceiling

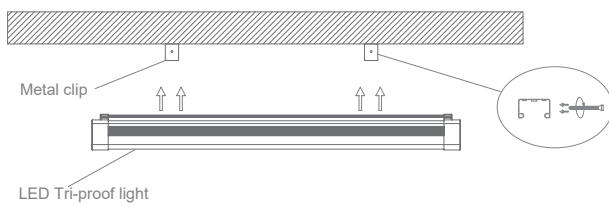


C: Install the lamp according to the clips`

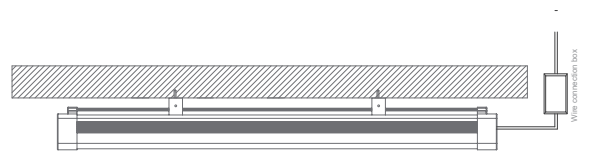


D: Connect the power to the lamp


## Suspended Mounting

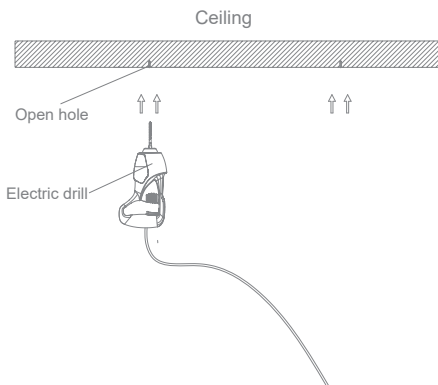


A: Find a right place and drill a hole

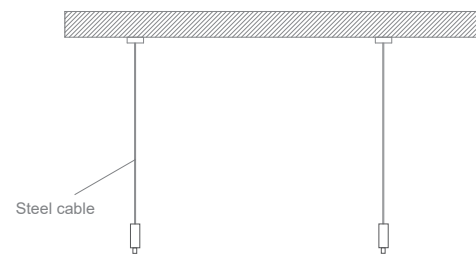

B: Install the steel cable holder to ceiling

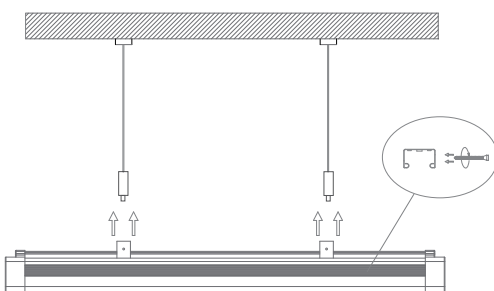

C : Install the fixture to the steel cable

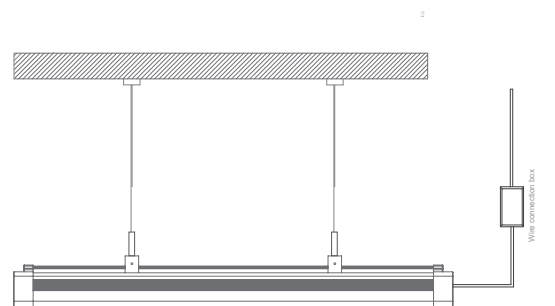

D: Connect the power to the lamp